






Fast Ice

# VM 900



## Modular ice maker - Vertical evaporator system Daily production up to 414 kg

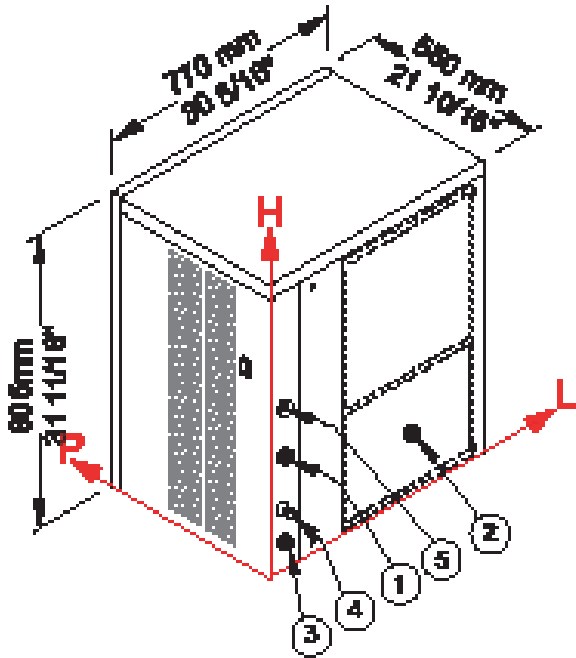

### ► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

### ► Performances

	Air temperature	Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
	10° C	414 kg					
	50° F		913 lbs				
	21° C			400 kg			
	70° F				882 lbs		
	32° C					334 kg	
	90° F						736 lbs

### ► Connections

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 38 mm / 1 8/16" - 252 mm / 9 15/16" - 3/4"
- ② Cond. water in.: 375 mm / 14 12/16" - 115 mm / 4 8/16" - 3/4"
- ③ Water out.: 32 mm / 1 4/16" - 40 mm / 1 9/16" - 24 mm / 15/16"
- ④ Cond. water out.: 28 mm / 1 2/16" - 93 mm / 3 11/16" - 12 mm / 8/16"
- ⑤ Electrical connections: 33 mm / 1 5/16" - 323 mm / 12 11/16"
- ② ④ Only water cooling systems

### ► Technical information

Production in 24h	400 kg / 882 lbs	Water consumption	A: 1,8 l/kg - 21,6 gal/100 lbs W: 13 l/kg - 155,8 gal/100 lbs
Cooling system	A - W	Sizes (L-P-H mm)	770 - 550 - 805
Kind of cube	7g	(L-P-H in)	30 5/16 - 21 10/16 - 31 11/16
Refrigerant	R452A	Sizes with pack (L-P-H mm)	815 - 615 - 980
Standard voltage	220-240 V ~ 50 Hz	(L-P-H in)	32 1/16 - 24 3/16 - 38 9/16
Average power consumption	3000 W	Net weight	113 kg / 249 lbs
Fuse	32 A	Gross weight	124 kg / 273 lbs
Finish	AISI 304 stainless steel, scotch brite		

All the technical information need to be considered at the following conditions:  
 Standard Cube (7 g)  
 Ambient temperature +21° C  
 Water temperature +15° C  
 Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025



[www.bremagroup.it](http://www.bremagroup.it)  
[info@bremaicegroup.it](mailto:info@bremaicegroup.it)

We are Brema

